
## anti-flooding valve Stausafe F, DN 100

Product Number:	66156
EAN:	40016
Discount group:	3

**61562** 001636661562

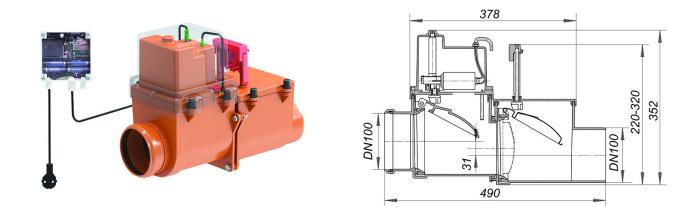

according to EN 13564 type 3 (F) operation conforms to DIN 1986-100:2002-03 for use with faecal waste water

specification:

- electronic flood sensor
- flap with electrically operated lock
- secondary stainless steel flap with manual lock
- stainless steel pivots
- sealed compartment for motor
- emergency power by batteries
- test-port
- easy-to-install ABS housing
- inspection cover with wingnuts can be opened for maintenance without tools
- electronic controls in box for on-wall mounting with warning lamp/ buzzer can be used with central building control systems.

flaps: 316Ti stainless steel/HDPE power supply: 230 V/0,5 A connection cable: 6 m, PUR, 5 x 0.75 mm<sup>2</sup> \* motor supply: 12 V low voltage emergency power: batteries, max. 6 days sensor: coaxial electrode sealing force: 500 newtons closing time: approx 9 seconds

The motorized flap and its related components can be supplied separately, to convert a type RS valve to type F specification, parts 664402/664426.

Dallmer GmbH + Co KG · Wiebelsheidestraße 25 · 59757 Arnsberg / Germany · Tel.: +49 2932 9616-0 · Fax: +49 2932 9616-222 www.dallmer.de · info@dallmer.de