


## DallFlex drain body – the original that sets the benchmark

*The DallFlex system. One drain body,  
seven shower channels*

PURE



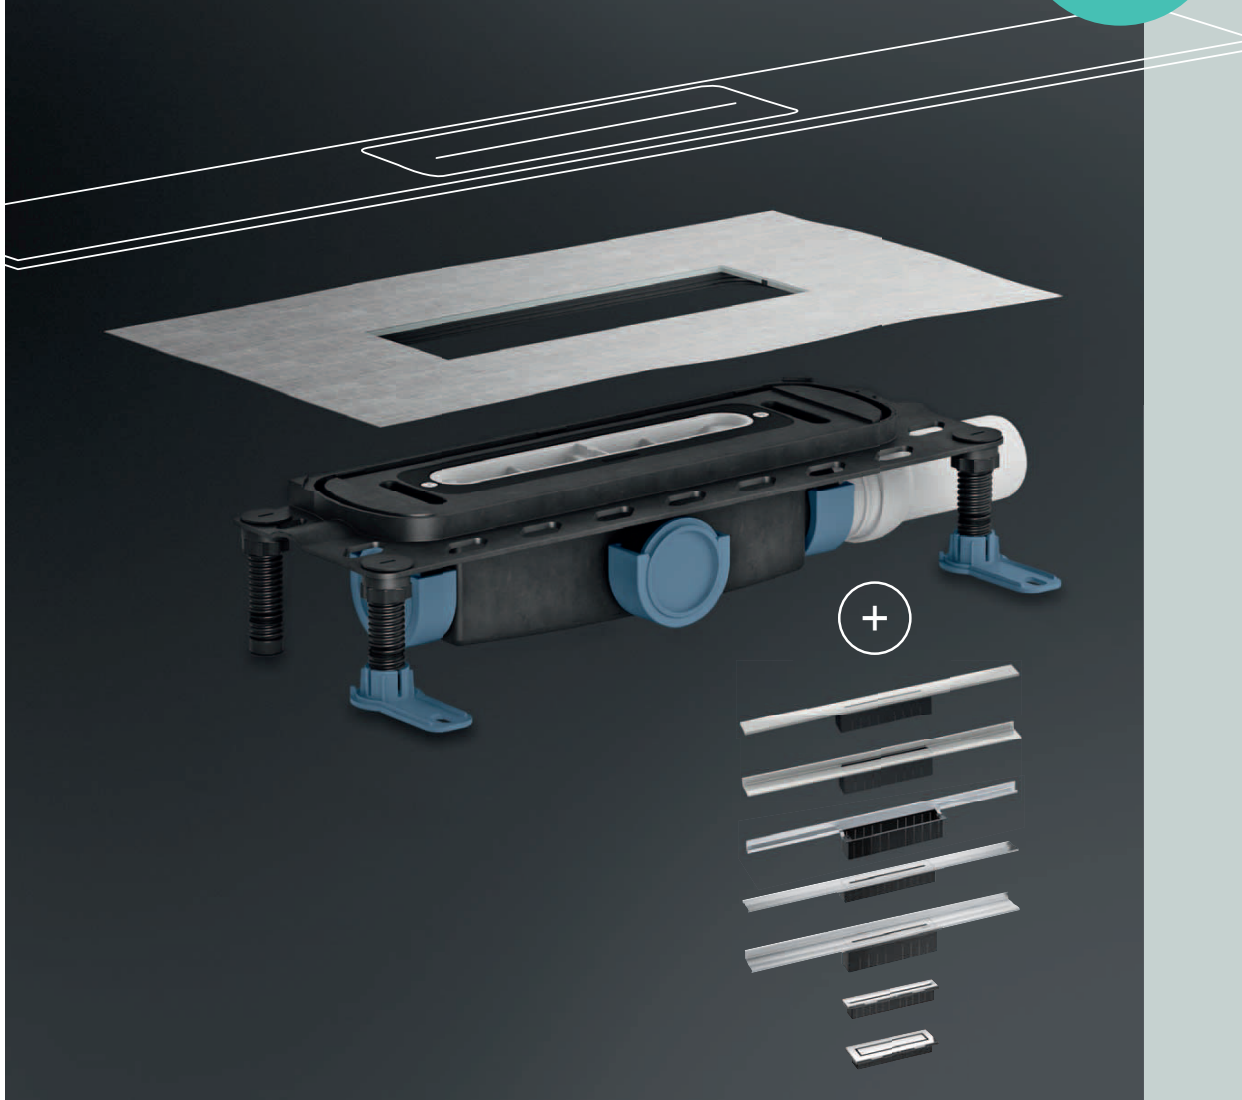

# Drain body DallFlex Duo

## DALLMER drain body DallFlex Duo Plan

for installation with shower channels CeraWall Duo.  
Two outlets DN 40 horizontal, can be positioned on three sides without tools,  
with ball-joint, adjustable 0 – 15 degrees

### SPECIFICATION

- integrated anchors for extra grip in the screed
- flexible sealing collar for secure bonding of under-tile waterproofing
- accessories for sound insulated installation
- sound absorbing and height adjustable levelling legs
- removable trap insert with 30 mm water seal
- temporary blanking plate

### MATERIAL

polypropylene  
outlet polyethylene

#### FLOW RATE TESTED TO DIN EN 1253 (with 20 mm water over cover plate)


	Required	Dallmer
DN 40	0.8 l/s	0.86 l/s

ITEM	DN	PART NO.
drain body DallFlex Duo Plan	DN 40	536501

Build-in height 65 mm




drain body DallFlex Duo Plan

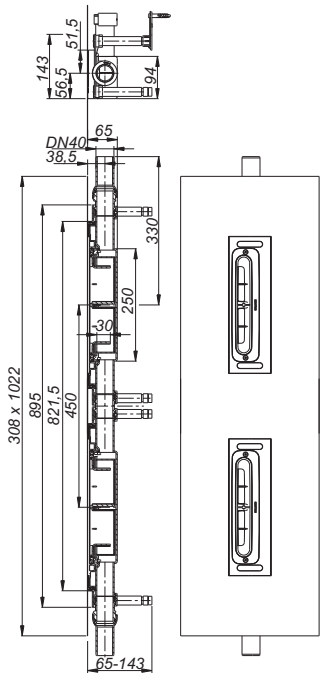


## DALLMER sound-insulating element DallFlex Duo Plan

for use with drain body DallFlex Duo Plan and shower channels CeraWall Duo.  
Tested to conform to DIN 4109/VDI 4100, certificate P-BA 142/2015 (CeraWall Individual Duo) and P-BA 144/2015 (CeraWall Select Duo).

ITEM	PART NO.
sound-insulating element DallFlex Duo Plan	539120



sound-insulating element DallFlex Duo Plan

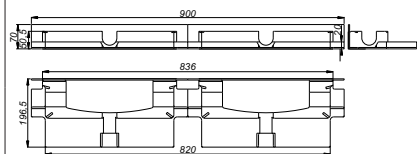

# Drain body DallFlex Duo

**DALLMER drain body DallFlex Duo vertical**  
conforming to DIN EN 1253  
for installation with shower channels CeraWall Duo.  
two drain bodies, two outlets DN 50 vertical


**SPECIFICATION**

- integrated anchors for extra grip in the screed
- flexible sealing collar for secure bonding of under-tile waterproofing
- accessories for sound insulated installation
- sound absorbing and height adjustable levelling legs
- removable trap insert with 50 mm water seal
- temporary blanking plate

**MATERIAL**

polypropylene

FLOW RATE TESTED TO DIN EN 1253 (with 20 mm water over cover plate)		
	Required	Dallmer
DN 50	0.8 l/s	2.35 l/s

ITEM	DN	PART NO.
 drain body DallFlex Duo vertical	DN 50	539083

 Fire protection system on request.

Build-in height 30 mm



drain body DallFlex Duo vertical

